




# LMP 80

portable monitor

## Technical Characteristics :


- Flow : 5000 l/min at 7 bar
- Max. working pressure: 12 bar
- Horizontal reach : -153° tot +101°
- Height reach : 0° to +85°
- Foldable legs
- 5000 l/min, in aluminium

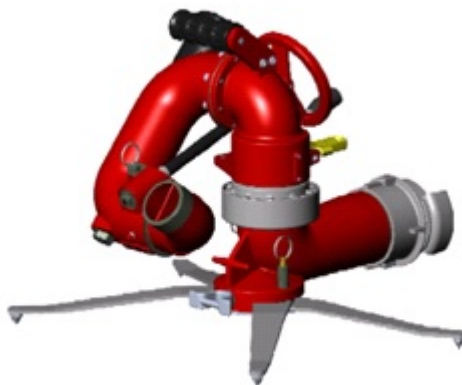

**29417**  
with diffuser  
"Autokador 5000" (08920)




**29418**  
With jet-pipe  
3000 l/min (27023)

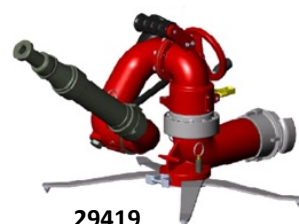

**29419**  
with water nozzle  
(26721)

Code	Composition	Measurements foldable (mm)	Weight (Kg)
29411	G 2.1/2" B outer wire	582 x 333 x 456	20,2
29417	With diffuser	653 x 346 x 456	23,8
29418	With jet-pipe	659 x 333 x 690	23,6
29419	With water nozzle	649 x 333 x 732	22,4
10847	Only mounting piece, lower part	476 x 187 x 200	8,4
22329	Only upper part	475 x 308 x 322	11,8

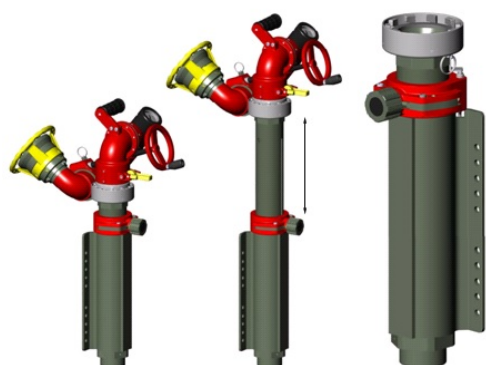

Telescopically Tube




14230

Combined with  
22329 or 29297



22011

Code	Omschrijving	Gewicht (Kg)
22329	Upper part (version with break)	11,8
29297	Upper part (version with blockage)	11,6
29176	Upper part (version with wheel)	12,5
08293	Telescopically tube (mound 300 mm / 12") – 3" BSP outer wire	15,4
11087	Telescopically tube (mound 450 mm / 18") – 3" BSP outer wire	19,3
11088	Telescopically tube (mound 300mm / 12") – 3" NPT outer wire	15,6
10983	Telescopically tube (mound 450 mm / 18") – 3" NPT outer wire	19,5
14230	Oscillator DN 100	5,5
08291	Securing adapter for trucks 3"flens ASA 150	
22011	Securing adapter for trucks 4" flens ASA 150	4
20803	Stowhandle	3,2

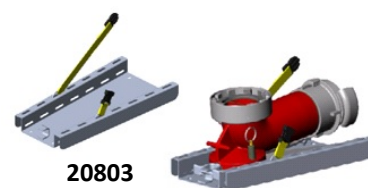

20803